




BWTSP Twist socket



PRODUCT DETAILS

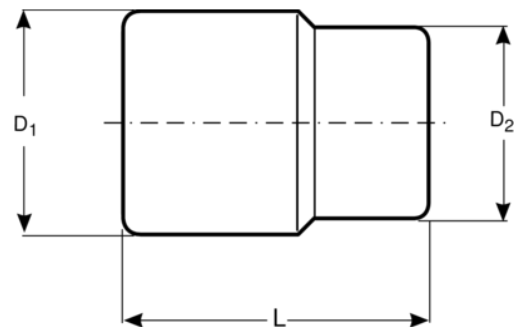


- Wheel twist sockets designed for removing damaged nuts and bolts, and especially for locking wheel nuts
- The special spiral profile on the inside enables the socket to grip sufficiently for loosening in cases where standard sockets and wrenches fail
- Drive: 3/8" or 1/2", depending on the profile dimension
- Black phosphate finish
- High performance alloy steel
- Hardness: 45-48 HRC
- Not suitable for machine operation
- 17 available dimensions
- Sold individually



Follow the Fish!



PRODUCT ATTRIBUTES

Product			D1	D2	L	
BWTSP1608	8 mm	3/8 in	12 mm	17 mm	32 mm	25 g
BWTSP1610	10 mm	3/8 in	15 mm	17 mm	32 mm	25 g
BWTSP1611	11 mm	3/8 in	16 mm	17 mm	32 mm	25 g
BWTSP1612	12 mm	3/8 in	18 mm	18 mm	32 mm	35 g
BWTSP1613	13 mm	3/8 in	19 mm	21 mm	32 mm	55 g
BWTSP1614	14 mm	3/8 in	20 mm	21 mm	32 mm	45 g
BWTSP1616	16 mm	3/8 in	22 mm	22 mm	32 mm	45 g
BWTSP1617	17 mm	3/8 in	25 mm	24 mm	32 mm	65 g
BWTSP1618	18 mm	3/8 in	25 mm	26 mm	34 mm	85 g
BWTSP1619	19 mm	3/8 in	26 mm	26 mm	34 mm	85 g
BWTSP1621	21 mm	1/2 in	30 mm	27 mm	34 mm	75 g
BWTSP1622	22 mm	1/2 in	32 mm	27 mm	34 mm	95 g
BWTSP1624	24 mm	1/2 in	33 mm	26 mm	34 mm	105 g
BWTSP1627	27 mm	1/2 in	37 mm	27 mm	34 mm	105 g
BWTSP732	32 mm	1/2 in	30 mm	42 mm	38 mm	165 g
BWTSP736	36 mm	3/4 in	38 mm	49 mm	48 mm	305 g
BWTSP741	41 mm	3/4 in	38 mm	55 mm	48 mm	325 g

