




4652 SDS+ Drill Bits 2-cutter for Concrete

PRODUCT DETAILS


- Immediate centring tip prevents skidding on smooth surfaces
- Large rebar chamfers (+35°) prevent side tip damages
- Size range 4 mm to 26 mm
- To withstand wear the drills are made of high-alloy steel produced with optimised hardening temperature
- For masonry, concrete, natural stone, artificial stone
- Fits directly into all hammer drilling machines with SDS-plus and HILTI TE-C drive
- Carbide Tipped 2-cutter with SDS+ connection
- Particularly suitable for drilling plug holes for fastenings
- Canal flute provides effective dust removal for increased endurance and reduced heat friction

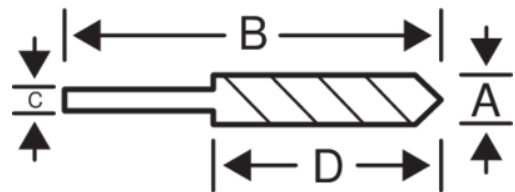

Follow the Fish!



PRODUCT ATTRIBUTES

Product	A	B	C	D	
4652-3-110	3.0 mm	110 mm	SD5+ mm	50 mm	33 g
4652-3.5-110	3.5 mm	110 mm	SD5+ mm	50 mm	35 g
4652-4-110	4.0 mm	110 mm	SD5+ mm	50 mm	40 g
4652-4-160	4.0 mm	160 mm	SD5+ mm	100 mm	44 g
4652-5-110	5.0 mm	110 mm	SD5+ mm	50 mm	53 g
4652-5-160	5.0 mm	160 mm	SD5+ mm	100 mm	43 g
4652-5-110-10P	5.0 mm	110 mm	SD5+ mm	50 mm	365 g
4652-5-160-10P	5.0 mm	160 mm	SD5+ mm	100 mm	412 g
4652-5-210	5.0 mm	210 mm	SD5+ mm	150 mm	50 g
4652-5.5-110	5.5 mm	110 mm	SD5+ mm	50 mm	42 g
4652-5.5-110-10P	5.5 mm	110 mm	SD5+ mm	50 mm	374 g
4652-5.5-160	5.5 mm	160 mm	SD5+ mm	100 mm	48 g
4652-5.5-160-10P	5.5 mm	160 mm	SD5+ mm	100 mm	429 g
4652-5.5-210	5.5 mm	210 mm	SD5+ mm	150 mm	50 g
4652-6-110	6.0 mm	110 mm	SD5+ mm	50 mm	59 g
4652-6-110-10P	6.0 mm	110 mm	SD5+ mm	50 mm	389 g
4652-6-160	6.0 mm	160 mm	SD5+ mm	100 mm	67 g
4652-6-160-10P	6.0 mm	160 mm	SD5+ mm	100 mm	452 g
4652-6-210	6.0 mm	210 mm	SD5+ mm	150 mm	46 g
4652-6-260	6.0 mm	260 mm	SD5+ mm	200 mm	54 g
4652-6.5-110	6.5 mm	110 mm	SD5+ mm	50 mm	45 g
4652-6.5-160	6.5 mm	160 mm	SD5+ mm	100 mm	51 g
4652-6.5-160-10P	6.5 mm	160 mm	SD5+ mm	100 mm	471 g
4652-7-110	7.0 mm	110 mm	SD5+ mm	50 mm	47 g
4652-7-160	7.0 mm	160 mm	SD5+ mm	100 mm	56 g
4652-8-110	8.0 mm	110 mm	SD5+ mm	50 mm	50 g
4652-8-160	8.0 mm	160 mm	SD5+ mm	100 mm	61 g
4652-8-160-10P	8.0 mm	160 mm	SD5+ mm	100 mm	543 g
4652-8-210	8.0 mm	210 mm	SD5+ mm	150 mm	72 g
4652-8-210-10P	8.0 mm	210 mm	SD5+ mm	150 mm	664 g
4652-8-260	8.0 mm	260 mm	SD5+ mm	200 mm	87 g
4652-8-460	8.0 mm	460 mm	SD5+ mm	400 mm	135 g
4652-9-160	9.0 mm	160 mm	SD5+ mm	100 mm	68 g
4652-9-210	9.0 mm	210 mm	SD5+ mm	150 mm	80 g
4652-10-110	10.0 mm	110 mm	SD5+ mm	50 mm	57 g
4652-10-160	10.0 mm	160 mm	SD5+ mm	100 mm	74 g
4652-10-160-10P	10.0 mm	160 mm	SD5+ mm	100 mm	673 g
4652-10-210	10.0 mm	210 mm	SD5+ mm	150 mm	89 g
4652-10-210-10P	10.0 mm	210 mm	SD5+ mm	150 mm	854 g
4652-10-260	10.0 mm	260 mm	SD5+ mm	200 mm	110 g
4652-10-310	10.0 mm	310 mm	SD5+ mm	250 mm	125 g
4652-10-450	10.0 mm	450 mm	SD5+ mm	400 mm	175 g
4652-10-600	10.0 mm	600 mm	SD5+ mm	550 mm	225 g
4652-11-160	11.0 mm	160 mm	SD5+ mm	100 mm	79 g
4652-11-210	11.0 mm	210 mm	SD5+ mm	150 mm	94 g
4652-11-260	11.0 mm	260 mm	SD5+ mm	200 mm	115 g
4652-12-160	12.0 mm	160 mm	SD5+ mm	100 mm	94 g
4652-12-160-10P	12.0 mm	160 mm	SD5+ mm	100 mm	869 g
4652-12-210	12.0 mm	210 mm	SD5+ mm	150 mm	120 g
4652-12-210-10P	12.0 mm	210 mm	SD5+ mm	150 mm	1118 g
4652-12-260	12.0 mm	260 mm	SD5+ mm	200 mm	140 g
4652-12-310	12.0 mm	310 mm	SD5+ mm	250 mm	165 g
4652-12-450	12.0 mm	450 mm	SD5+ mm	400 mm	225 g
4652-12-600	12.0 mm	600 mm	SD5+ mm	550 mm	300 g
4652-12-1000	12.0 mm	1000 mm	SD5+ mm	950 mm	485 g
4652-13-160	13.0 mm	160 mm	SD5+ mm	100 mm	105 g
4652-13-310	13.0 mm	310 mm	SD5+ mm	250 mm	180 g
4652-14-160	14.0 mm	160 mm	SD5+ mm	100 mm	105 g
4652-14-210	14.0 mm	210 mm	SD5+ mm	150 mm	125 g
4652-14-260	14.0 mm	260 mm	SD5+ mm	200 mm	155 g
4652-14-310	14.0 mm	310 mm	SD5+ mm	250 mm	180 g
4652-14-450	14.0 mm	450 mm	SD5+ mm	400 mm	260 g
4652-14-600	14.0 mm	600 mm	SD5+ mm	550 mm	325 g
4652-14-1000	14.0 mm	1000 mm	SD5+ mm	950 mm	530 g
4652-15-160	15.0 mm	160 mm	SD5+ mm	100 mm	120 g
4652-15-260	15.0 mm	260 mm	SD5+ mm	200 mm	185 g
4652-16-160	16.0 mm	160 mm	SD5+ mm	100 mm	120 g
4652-16-210	16.0 mm	210 mm	SD5+ mm	150 mm	150 g
4652-16-260	16.0 mm	260 mm	SD5+ mm	200 mm	185 g
4652-16-310	16.0 mm	310 mm	SD5+ mm	250 mm	225 g
4652-16-450	16.0 mm	450 mm	SD5+ mm	400 mm	320 g
4652-16-600	16.0 mm	600 mm	SD5+ mm	550 mm	410 g
4652-16-800	16.0 mm	800 mm	SD5+ mm	750 mm	550 g
4652-16-1000	16.0 mm	1000 mm	SD5+ mm	950 mm	630 g
4652-18-200	18.0 mm	200 mm	SD5+ mm	150 mm	205 g
4652-18-300	18.0 mm	300 mm	SD5+ mm	250 mm	300 g
4652-18-450	18.0 mm	450 mm	SD5+ mm	400 mm	460 g
4652-18-1000	18.0 mm	1000 mm	SD5+ mm	950 mm	833 g
4652-20-200	20.0 mm	200 mm	SD5+ mm	150 mm	240 g
4652-20-300	20.0 mm	300 mm	SD5+ mm	250 mm	345 g
4652-20-450	20.0 mm	450 mm	SD5+ mm	400 mm	525 g
4652-20-600	20.0 mm	600 mm	SD5+ mm	550 mm	670 g
4652-20-1000	20.0 mm	1000 mm	SD5+ mm	950 mm	1100 g
4652-22-250	22.0 mm	250 mm	SD5+ mm	200 mm	345 g
4652-22-450	22.0 mm	450 mm	SD5+ mm	400 mm	640 g
4652-22-600	22.0 mm	600 mm	SD5+ mm	550 mm	825 g
4652-22-1000	22.0 mm	1000 mm	SD5+ mm	950 mm	1295 g
4652-24-250	24.0 mm	250 mm	SD5+ mm	200 mm	400 g
4652-24-450	24.0 mm	450 mm	SD5+ mm	400 mm	735 g
4652-25-250	25.0 mm	250 mm	SD5+ mm	200 mm	440 g
4652-25-450	25.0 mm	450 mm	SD5+ mm	400 mm	800 g
4652-25-1000	25.0 mm	1000 mm	SD5+ mm	950 mm	1665 g
4652-26-250	26.0 mm	250 mm	SD5+ mm	200 mm	440 g
4652-26-450	26.0 mm	450 mm	SD5+ mm	400 mm	800 g

Follow the Fish!



Contact: info@bahco.com / www.bahco.com