




4656

SDS Max Drill Bits 4-cutter for Reinforced Concrete

PRODUCT DETAILS


- Immediate centring tip prevents skidding on smooth surfaces
- Size range 12 mm to 52 mm
- Optimised 4 x 90° symmetry makes all 4 carbide cutting edges work evenly and at the same time
- To withstand wear the drills are made of high-alloy steel produced with optimised hardening temperature
- For masonry, reinforced concrete, natural stone, artificial stone
- Specially designed head geometry for better centre drilling, faster drilling progress, precise drilling hole
- Fits directly into all hammer drilling machines with SDS max holders
- Carbide Tipped 4-cutter with SDS MAX connection
- flute provides effective dust removal for increased endurance and reduced heat friction

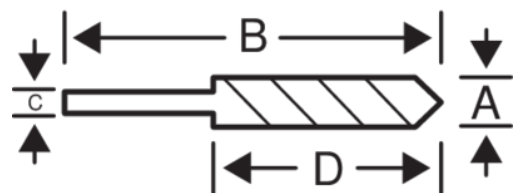

Follow the Fish!



PRODUCT ATTRIBUTES

Product	A	B	C	D	 g
4656-12-340	12.0 mm	340 mm	SDS MAX mm	200 mm	390 g
4656-12-540	12.0 mm	540 mm	SDS MAX mm	400 mm	510 g
4656-12-690	12.0 mm	690 mm	SDS MAX mm	550 mm	615 g
4656-14-340	14.0 mm	340 mm	SDS MAX mm	200 mm	405 g
4656-14-540	14.0 mm	540 mm	SDS MAX mm	400 mm	535 g
4656-15-340	15.0 mm	340 mm	SDS MAX mm	200 mm	455 g
4656-15-540	15.0 mm	540 mm	SDS MAX mm	400 mm	605 g
4656-16-1320	16.0 mm	1320 mm	SDS MAX mm	1180 mm	1340 g
4656-16-340	16.0 mm	340 mm	SDS MAX mm	200 mm	465 g
4656-16-540	16.0 mm	540 mm	SDS MAX mm	400 mm	650 g
4656-18-1320	18.0 mm	1320 mm	SDS MAX mm	1180 mm	1675 g
4656-18-340	18.0 mm	340 mm	SDS MAX mm	200 mm	530 g
4656-18-540	18.0 mm	540 mm	SDS MAX mm	400 mm	780 g
4656-18-940	18.0 mm	940 mm	SDS MAX mm	800 mm	1205 g
4656-20-1320	20.0 mm	1320 mm	SDS MAX mm	1200 mm	1870 g
4656-20-320	20.0 mm	320 mm	SDS MAX mm	200 mm	525 g
4656-20-520	20.0 mm	520 mm	SDS MAX mm	400 mm	795 g
4656-20-920	20.0 mm	920 mm	SDS MAX mm	800 mm	1310 g
4656-22-1320	22.0 mm	1320 mm	SDS MAX mm	1200 mm	2100 g
4656-22-320	22.0 mm	320 mm	SDS MAX mm	200 mm	575 g
4656-22-520	22.0 mm	520 mm	SDS MAX mm	400 mm	895 g
4656-22-920	22.0 mm	920 mm	SDS MAX mm	800 mm	1505 g
4656-24-320	24.0 mm	320 mm	SDS MAX mm	200 mm	630 g
4656-24-520	24.0 mm	520 mm	SDS MAX mm	400 mm	995 g
4656-25-1320	25.0 mm	1320 mm	SDS MAX mm	1200 mm	2575 g
4656-25-320	25.0 mm	320 mm	SDS MAX mm	200 mm	665 g
4656-25-520	25.0 mm	520 mm	SDS MAX mm	400 mm	1050 g
4656-25-920	25.0 mm	920 mm	SDS MAX mm	800 mm	1810 g
4656-26-520	26.0 mm	520 mm	SDS MAX mm	400 mm	1065 g
4656-28-370	28.0 mm	370 mm	SDS MAX mm	250 mm	875 g
4656-28-570	28.0 mm	570 mm	SDS MAX mm	450 mm	1310 g
4656-28-670	28.0 mm	670 mm	SDS MAX mm	550 mm	1590 g
4656-28-920	28.0 mm	920 mm	SDS MAX mm	800 mm	2095 g
4656-30-370	30.0 mm	370 mm	SDS MAX mm	250 mm	965 g
4656-30-570	30.0 mm	570 mm	SDS MAX mm	450 mm	1450 g
4656-32-1320	32.0 mm	1320 mm	SDS MAX mm	1200 mm	3715 g
4656-32-370	32.0 mm	370 mm	SDS MAX mm	250 mm	1140 g
4656-32-570	32.0 mm	570 mm	SDS MAX mm	450 mm	1570 g
4656-32-920	32.0 mm	920 mm	SDS MAX mm	800 mm	2700 g
4656-35-370	35.0 mm	370 mm	SDS MAX mm	250 mm	1255 g
4656-35-570	35.0 mm	570 mm	SDS MAX mm	450 mm	1710 g
4656-35-670	35.0 mm	670 mm	SDS MAX mm	550 mm	2035 g
4656-37-370	37.0 mm	370 mm	SDS MAX mm	250 mm	1180 g
4656-37-570	37.0 mm	570 mm	SDS MAX mm	450 mm	1785 g
4656-37-920	37.0 mm	920 mm	SDS MAX mm	800 mm	2940 g
4656-38-370	38.0 mm	370 mm	SDS MAX mm	250 mm	1425 g
4656-38-570	38.0 mm	570 mm	SDS MAX mm	450 mm	1890 g
4656-40-1320	40.0 mm	1320 mm	SDS MAX mm	1200 mm	4770 g
4656-40-370	40.0 mm	370 mm	SDS MAX mm	250 mm	1325 g
4656-40-570	40.0 mm	570 mm	SDS MAX mm	450 mm	2050 g
4656-40-920	40.0 mm	920 mm	SDS MAX mm	800 mm	3310 g
4656-45-570	45.0 mm	570 mm	SDS MAX mm	450 mm	2400 g
4656-45-920	45.0 mm	920 mm	SDS MAX mm	800 mm	3910 g
4656-50-570	50.0 mm	570 mm	SDS MAX mm	450 mm	2730 g
4656-52-570	52.0 mm	570 mm	SDS MAX mm	450 mm	2975 g

Follow the Fish!

