





## TAW

### Electronic Torque and Angle Wrench with Fixed Ratchet Head



#### PRODUCT DETAILS

- Torque units in N·m, kg.cm, dN·m, ft.lb, lb.in and angle units in degrees
- Torque range covers from 7 to 800 N·m and from 5.1 to 590 ft.lb
- It can be used CW and ACW at temperatures between 5 °C and 42 °C
- Memory capacity of 50 readings and up to 10 presets
- Torque, angle, torque then angle and preset modes
- Counter
- Data and set value retention during battery exchange
- Programmable automatic shut-off time
- Programmable Recalibration warning
- More advanced configurations and settings available in the user manual
- Accurate to  $\pm 2\%$  CW and 3% ACW between 20% and 100% of max torque
- Visual (dual LEDs + backlit LCD display), audio and vibration signal
- 40-tooth fixed ratchet heads from 3/8" to 3/4" square drives
- Bezel in ABS and all-metal body for higher strength and duration
- Metal handle with reverse threaded end cap to enclose AA alkaline batteries (included)
- Supplied in sturdy blow mould case
- Supplied with a factory declaration of conformity and CE marking
- 2014/30/EC, ISO 6789
- Made in USA

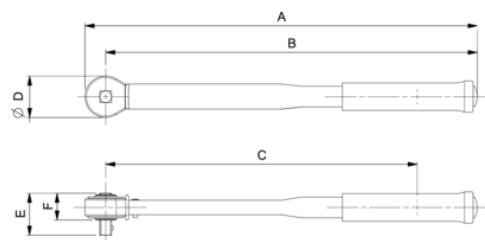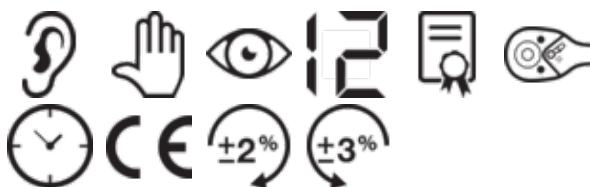










Follow the Fish!












## PRODUCT ATTRIBUTES










### Product: TAW38135

	7-135 Nm		62-1194 lb·in		5.2-99.5 lb·ft
	3/8 in		1 Nm		1 lb·in
	1 lb·ft		0-360°	<b>A</b>	475 mm
<b>B</b>	460 mm	<b>C</b>	380 mm	<b>D</b>	28 mm
<b>E</b>	28 mm	<b>F</b>	15 mm		1.270 kg

### Product: TAW12340

	17-340 Nm		150.5-3009 lb·in		12.5-250 lb·ft
	1/2 in		1 Nm		1 lb·in
	1 lb·ft		0-360°	<b>A</b>	670 mm
<b>B</b>	650 mm	<b>C</b>	570 mm	<b>D</b>	35 mm
<b>E</b>	35 mm	<b>F</b>	18 mm		1.910 kg

### Product: TAW34800

	40-800 Nm		354-7080 lb·in		29.5-590 lb·ft
	3/4 in		1 Nm		1 lb·in
	1 lb·ft		0-360°	<b>A</b>	1235 mm
<b>B</b>	1198 mm	<b>C</b>	1053 mm	<b>D</b>	60 mm
<b>E</b>	55 mm	<b>F</b>	40 mm		4.850 kg

