




## K8906M

3/4" Square Drive Deep Impact  
Sockets with Metric Hex Profile and  
Phosphate Finish



### PRODUCT DETAILS

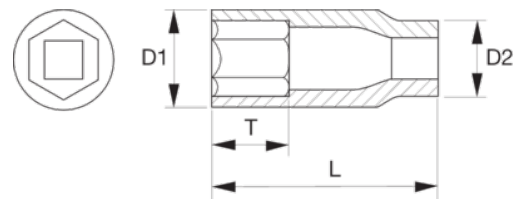


- To be used with machines
- For maximum safety use clamping springs
- Phosphate finish
- High-performance alloy steel
- Dynamic-Drive™ Profile to protect nuts, screws and tools from unnecessary wear and damage
- T = depth of female hexagon
- Drive standard: DIN 3121-H 20, ISO 1174
- Standards: DIN 3129, ISO 2725



Follow the Fish!



## PRODUCT ATTRIBUTES

Product		<b>L</b>	<b>D1</b>	<b>D2</b>	<b>T</b>		
<b>K8906M-17</b>	17 mm	100 mm	30 mm	44 mm	13 mm	K560F-6	910 g
<b>K8906M-19</b>	19 mm	95 mm	32.5 mm	44 mm	14 mm	K560F-6	580 g
<b>K8906M-21</b>	21 mm	100 mm	36.5 mm	44 mm	14 mm	K560F-6	845 g
<b>K8906M-22</b>	22 mm	95 mm	35 mm	42 mm	16 mm	K560F-6	640 g
<b>K8906M-24</b>	24 mm	100 mm	39 mm	44 mm	16 mm	K560F-6	700 g
<b>K8906M-27</b>	27 mm	100 mm	43 mm	44 mm	18 mm	K560F-6	750 g
<b>K8906M-30</b>	30 mm	100 mm	46 mm	44 mm	19 mm	K560F-6	770 g
<b>K8906M-32</b>	32 mm	95 mm	49 mm	44 mm	22 mm	K560F-6	825 g
<b>K8906M-33</b>	33 mm	95 mm	50.8 mm	44 mm	22 mm	K560F-6	890 g
<b>K8906M-34</b>	34 mm	95 mm	50.8 mm	42 mm	22 mm	K560F-6	890 g
<b>K8906M-36</b>	36 mm	95 mm	54 mm	44 mm	22 mm	K560F-6	930 g
<b>K8906M-41</b>	41 mm	95 mm	60.5 mm	44 mm	24 mm	K560F-6	1100 g
<b>K8906M-46</b>	46 mm	95.2 mm	67 mm	44 mm	22.4 mm	K560F-6	1310 g

