




**28MV**

## Insulated T-Handle Socket Wrenches



### PRODUCT DETAILS

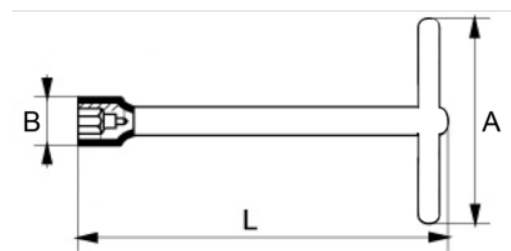

- Dip-coated insulation
- 3-layer safety colour code insulation
- For working on live equipment up to 1000 V according to IEC 60900
- 6-point dynamic-drive profile
- Opening tolerance according to ISO 691
- Made from high-performance alloy steel
- 3 Multi-layer coating with different colours indicating safety, danger or high danger. Plus a 4th one in black to further protect handle edges
- This provides protection as well as creating a visual warning system
- If the outer insulation layer gets damaged, the lighter colour underneath will become visible and warn the user
- Each and every tool is tested to 10.000V for 10 seconds at the end of the manufacturing cycle



**Follow the Fish!**



## PRODUCT ATTRIBUTES

Product		<b>L</b>	<b>A</b>	<b>B</b>	
<b>28MV-8</b>	8.0 mm	200 mm	190 mm	16.5 mm	101 g
<b>28MV-9</b>	9.0 mm	200 mm	190 mm	18 mm	143 g
<b>28MV-10</b>	10.0 mm	200 mm	190 mm	19.5 mm	150 g
<b>28MV-11</b>	11.0 mm	200 mm	190 mm	20.5 mm	159 g
<b>28MV-12</b>	12.0 mm	200 mm	190 mm	22 mm	216 g
<b>28MV-13</b>	13.0 mm	200 mm	190 mm	23 mm	260 g
<b>28MV-14</b>	14.0 mm	200 mm	190 mm	24.5 mm	272 g
<b>28MV-15</b>	15.0 mm	200 mm	190 mm	25.5 mm	312 g
<b>28MV-16</b>	16.0 mm	200 mm	190 mm	27 mm	322 g
<b>28MV-17</b>	17.0 mm	200 mm	190 mm	28 mm	331 g
<b>28MV-18</b>	18.0 mm	200 mm	190 mm	29.5 mm	421 g
<b>28MV-19</b>	19.0 mm	200 mm	190 mm	30.5 mm	435 g
<b>28MV-20</b>	20.0 mm	200 mm	190 mm	32.5 mm	515 g
<b>28MV-21</b>	21.0 mm	200 mm	190 mm	33 mm	531 g
<b>28MV-22</b>	22.0 mm	200 mm	190 mm	34.5 mm	579 g

