




## **BWTSP617-BWTSP624** **Deep Twist Sockets**



### PRODUCT DETAILS

- Wheel twist sockets designed for removing damaged nuts and bolts, and especially for locking wheel nuts
- The special spiral profile on the inside enables the socket to grip sufficiently for loosening in cases where standard sockets and wrenches fail
- Drive: 1/2"
- Black phosphate finish
- High performance alloy steel
- Hardness: 45-48 HRC
- Not suitable for machine operation
- 5 available dimensions: 17, 19, 21, 22 and 24 mm
- Sold individually

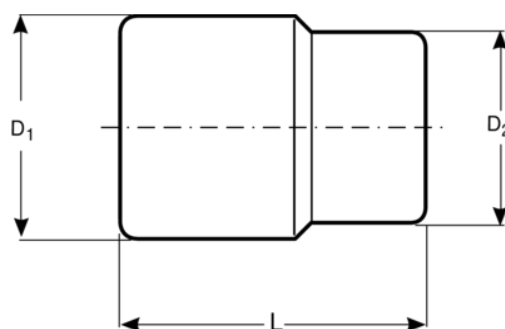

**Follow the Fish!**



## PRODUCT ATTRIBUTES

| Product         |  |  | D1      | D2      | L       |  |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|---------|---------|-------------------------------------------------------------------------------------|
| <b>BWTSP617</b> | 17 mm                                                                             | 1/2 in                                                                            | 25.2 mm | 24 mm   | 50.0 mm | 105 g                                                                               |
| <b>BWTSP619</b> | 19 mm                                                                             | 1/2 in                                                                            | 27 mm   | 27 mm   | 50.0 mm | 125 g                                                                               |
| <b>BWTSP621</b> | 21 mm                                                                             | 1/2 in                                                                            | 27.1 mm | 29.8 mm | 50.0 mm | 125 g                                                                               |
| <b>BWTSP622</b> | 22 mm                                                                             | 1/2 in                                                                            | 27 mm   | 30.5 mm | 50.0 mm | 135 g                                                                               |
| <b>BWTSP624</b> | 24 mm                                                                             | 1/2 in                                                                            | 27 mm   | 33 mm   | 50.0 mm | 135 g                                                                               |

Follow the Fish!

