




K7806Z

**1/2" Square Drive Deep Impact
Sockets with Imperial Hex Profile and
Phosphate Finish**



PRODUCT DETAILS

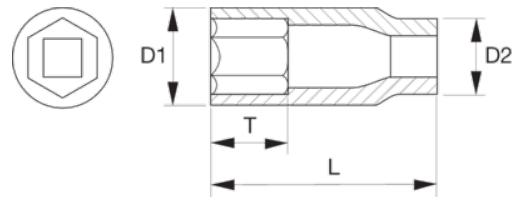


- To be used with machines
- For maximum safety use clamping springs
- Phosphate finish
- High-performance alloy steel
- Dynamic-Drive™ Profile to protect nuts, screws and tools from unnecessary wear and damage
- T = depth of female hexagon
- Drive standard: DIN 3121-G 12.5 ISO 1174



Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	D1	D2	T		
K7806Z-3/8	3/8 in	78 mm	17 mm	25 mm	12 mm	K560F-4	160 g
K7806Z-7/16	7/16 in	78 mm	18.5 mm	25 mm	13 mm	K560F-4	160 g
K7806Z-1/2	1/2 in	78 mm	20.5 mm	25 mm	14 mm	K560F-4	180 g
K7806Z-9/16	9/16 in	78 mm	23 mm	25 mm	14 mm	K560F-4	180 g
K7806Z-5/8	5/8 in	78 mm	24.5 mm	30 mm	16 mm	K560F-5	220 g
K7806Z-11/16	11/16 in	78 mm	27 mm	30 mm	17 mm	K560F-5	220 g
K7806Z-3/4	3/4 in	78 mm	28 mm	30 mm	20 mm	K560F-5	225 g
K7806Z-13/16	13/16 in	78 mm	30 mm	30 mm	22 mm	K560F-5	250 g
K7806Z-7/8	7/8 in	78 mm	31.8 mm	30 mm	22 mm	K560F-5	320 g
K7806Z-15/16	15/16 in	78 mm	33.8 mm	30 mm	24 mm	K560F-5	310 g
K7806Z-1	1 in	80 mm	35.8 mm	30 mm	27 mm	K560F-5	330 g
K7806Z-1.1/16	1 1/16 in	78 mm	37.8 mm	30 mm	27 mm	K560F-5	410 g
K7806Z-1.1/8	1 1/8 in	78 mm	39.8 mm	30 mm	27 mm	K560F-5	410 g
K7806Z-1.1/4	1 1/4 in	78 mm	43.8 mm	30 mm	32 mm	K560F-5	430 g
K7806Z-1.5/16	1 5/16 in	78 mm	44.8 mm	30 mm	32 mm	K560F-5	430 g
K7806Z-1.3/8	1 3/8 in	78 mm	47.8 mm	30 mm	32 mm	K560F-5	480 g
K7806Z-1.7/16	1 7/16 in	78 mm	49.8 mm	30 mm	32 mm	K560F-5	570 g
K7806Z-1.1/2	1 1/2 in	78 mm	49.8 mm	30 mm	32 mm	K560F-5	570 g

Follow the Fish!

