




## BE1GP58/BE1GP514 Glow plug flex sockets

### PRODUCT DETAILS


- Equipped with a spring ring ball type retainer system to prevent the glow plug from falling down when removing or installing
- Cardan system enables access to difficult-to-reach places and provides flexibility
- Suitable for a wide range of glow plugs on the market
- Drive: 1/4"
- High performance alloy steel
- Hardness: 43-47 HRC
- Ideal to for use with BE1GP5-T T-handle
- Part of the BE1GP5 set

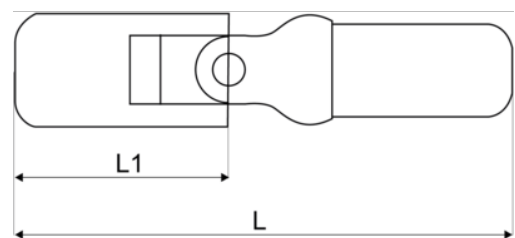

Follow the Fish!



## PRODUCT ATTRIBUTES

Product			<b>L</b>	<b>L1</b>		
<b>BE1GP58</b>	8 mm		70 mm	52 mm	Peugot/Renault/Citroen/Ford/Mercedes	40 g
<b>BE1GP59</b>	9 mm		70 mm	52 mm	Opel/Fiat/Lancia/Alfa/Seat/VW	45 g
<b>BE1GP510</b>	10 mm		70 mm	52 mm	Mercedes/Peugeot/Audi/Seat/VW	45 g
<b>BE1GP512</b>	12 mm		70 mm	52 mm	Peugeot/Renault/Citroën/BMW/Opel	45 g
<b>BE1GP514</b>	14 mm		70 mm	52 mm	Universal	55 g

**Follow the Fish!**

