




6MV

Insulated Open End Wrenches

PRODUCT DETAILS

- Dip-coated insulation
- 2-Layer colour insulation coating 6 mm to 16 mm wrenches
- 3-Layer colour insulation coating 17 mm to 32 mm wrenches
- For working on live equipment up to 1000 V according to IEC 60900
- Made of high performance alloy steel
- Opening tolerance according to ISO 691
- 2-3 Multi-layer coating with different colours indicating safety, danger or high danger. Plus a 4th one in black to further protect handle edges
- This provides protection as well as creating a visual warning system
- If the outer insulation layer gets damaged, the lighter colour underneath will become visible and warn the user
- Each and every tool is tested to 10.000V for 10 seconds at the end of the manufacturing cycle

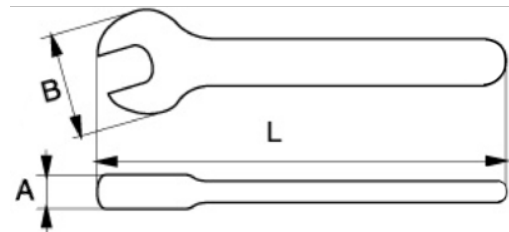

Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	A	B	
6MV-6	6 mm	92 mm	3.7 mm	15 mm	25 g
6MV-7	7 mm	92 mm	3.7 mm	17.5 mm	30 g
6MV-8	8 mm	92 mm	4 mm	18 mm	40 g
6MV-9	9 mm	98 mm	4 mm	21 mm	45 g
6MV-10	10 mm	108 mm	5 mm	24 mm	55 g
6MV-11	11 mm	116 mm	5 mm	26 mm	60 g
6MV-12	12 mm	125 mm	5.5 mm	28 mm	70 g
6MV-13	13 mm	135 mm	5.5 mm	31 mm	75 g
6MV-14	14 mm	140 mm	6 mm	31 mm	85 g
6MV-15	15 mm	150 mm	6 mm	33 mm	90 g
6MV-16	16 mm	157 mm	6.5 mm	34 mm	105 g
6MV-17	17 mm	162 mm	6.5 mm	37 mm	120 g
6MV-18	18 mm	170 mm	7 mm	39 mm	145 g
6MV-19	19 mm	175 mm	7 mm	42 mm	150 g
6MV-20	20 mm	180 mm	7.5 mm	43 mm	170 g
6MV-21	21 mm	184 mm	7.5 mm	46 mm	205 g
6MV-22	22 mm	193 mm	7.5 mm	47 mm	215 g
6MV-23	23 mm	203 mm	8 mm	49 mm	220 g
6MV-24	24 mm	210 mm	8.5 mm	51 mm	275 g
6MV-27	27 mm	225 mm	9.5 mm	59 mm	370 g
6MV-30	30 mm	240 mm	10 mm	63 mm	470 g
6MV-32	32 mm	250 mm	10 mm	68 mm	530 g

