




BH7100A **Hydro-pneumatic press 100T**



PRODUCT DETAILS

- Double speed hydro-pneumatic pump controlled by pedal with built-in safety overload valve
- Sturdy welded frame with exclusive rounded shapes design
- Large pressure gauge with glycerine for easy reading at convenient eye level
- Slide and piston chrome plated
- Easy raising and lowering of the press table thanks to the winch with swivel handle
- Rulers to facilitate centring the piston on the item to be extracted
- Two V-blocks with handles included, usable on V or flat side depending as needed
- Auto-centring table pins incorporating “butterfly” locks to keep them engaged for greater safety
- All handles insulated
- Pressing pin set with 8 pins and a punch plate included.
- Tool tray at the bottom
- Working pressure: 7.5-8.5 bar 0.75-0.85 MPa Air connection: 1/4" NPT
- CE certified by Official Independent Technical Inspection Association

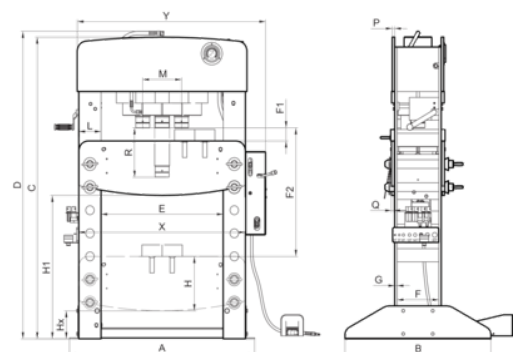

Follow the Fish!



PRODUCT ATTRIBUTES

Product: **BH7100A**

	100000 kg	BAR	7,5 - 8,5 bar		1/4" in
	1 mm	A	1193 mm	B	940 mm
C	1830 mm	D	1865 mm	E	787 mm
F1	85 mm	F2	785 mm	F	268 mm
G	16 mm	H	325 mm	L	143 mm
M	250 mm	R	300 mm	X	1073 mm
Y	1210 mm		674 kg		

Follow the Fish!



Contact: info@bahco.com / www.bahco.com